

230 V AC / 48 V, 5 A DC Power Supply for Obelux Obstacle lights**Key features**

- Extremely reliable - long lifetime
- Optimised for Obelux 10-48-F, 32-48-F and MI-IF-048 (2000 cd luminous output) LED-obstacle lights
- 230 V AC input voltage / 48 V DC output voltage
- Degree of protection IP67
- Die cast aluminium enclosure
- Easy to install
- No RF-radiations

Electrical characteristics

- 230 V AC 50 Hz input voltage
- Power consumption max 220 VA
- Output voltage 48 V DC
- Maximum output current 5 A

Mechanical characteristics

- Yellow powder painted die cast aluminium body
- Degree of protection IP67
- Operating temperature range -55°C ... +55°C
- Height 348 mm, width 205 mm, depth 115 mm
- Weight 4 kg

**Obelux PS-48-05 Power Supply**


Order Code: Obelux PS-48-05
Obelux PS-48-05-PCFL (with Photocell & Flash Controller)

Warranty: 5 year


Made in Finland

Technical information in this document is subject to change without notice. Copyright © Obelux Oy 2005

230 V AC / 48 V, 5 A DC Power Supply for Obelux Obstacle lights

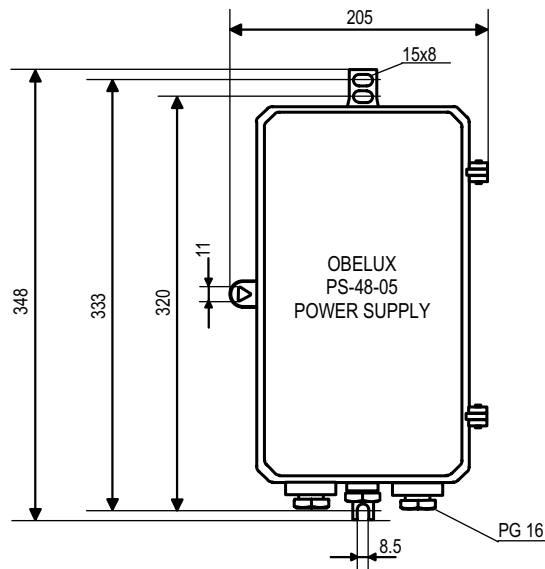

Mechanical dimensions

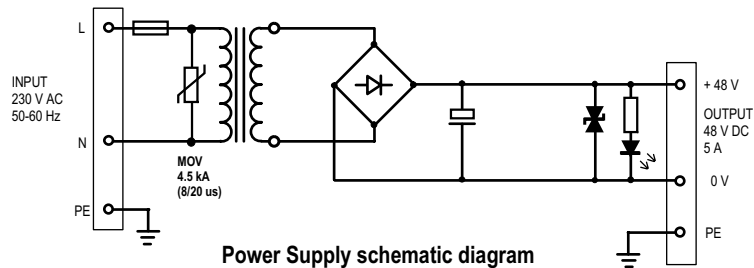

Power Supply schematic diagram

Technical information in this document is subject to change without notice. Copyright © Obelux Oy 2005